

Gigabit 24V 30W PoE Midspan

Product Overview

UL-POE-24-30W-G is an indoor rated PoE midspan Injector specially designed for complex backhaul and networking applications. It provides 24Vdc, 1.25A power for remote PDs over 2 pairs output. It supports both 10/100 Base-T and Gigabit device. It works for 30W PoE PDs, such as wireless APs, Wifi routers, Network cameras, IP Phones, Microwave Radio and other power Ethernet terminals.




UL-POE-24-30W-G

Enclosed in an IP40 fire retardant plastic case. It works with a wide input voltage of 100-240 VAC, 50 or 60 Hz. The effective distance is 100 meters over Cat5e/Cat6 cables. It is small in size but high performance.

This item was joined in "Going Green" campaign, Energy related Products(ErP) directive.



Product Profile




1. LAN: Data Input Port
2. PoE: Data & Power Output Port



3. PoE Load Indicator
4. AC Power Input

Product Working Diagram

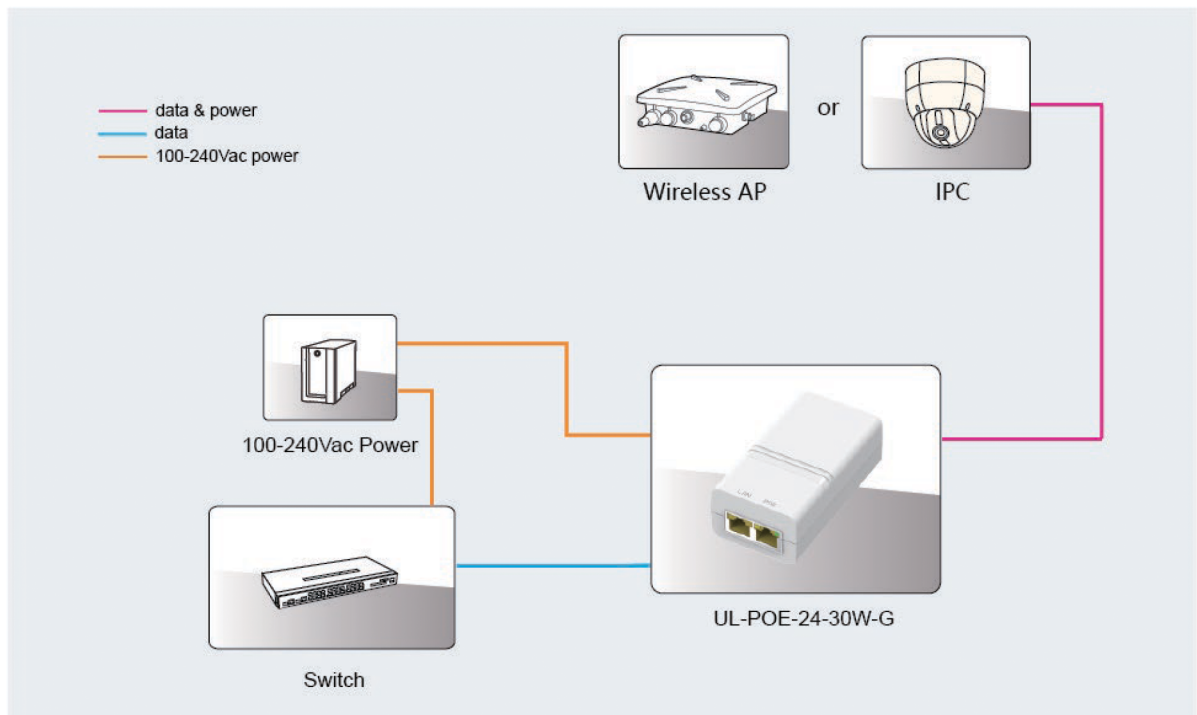

Specification

Standard

- IEEE802.3 10Base-T Ethernet
- IEEE802.3u 100Base-Tx Fast Ethernet
- IEEE802.3ab 1000Base-T Gigabit Ethernet
- RoHS Compliance
- WEEE Compliance

Input & Output

- Input :100-240Vac 1.0A 50/60Hz
- Output: 24Vdc 1250mA
- Power Pins: 4/5(+), 7/8(-)
- Data Speed: 10/100/1000Mbps

Working Environment

- Operating Temperature: 0℃ to 40℃
- Operating Humidity: 20% to 80%, non-condensation
- Storage Temperature: -20℃ to 70℃
- Storage Humidity: 10% to 90%, non-condensation
- Operating Altitude: up to 2000meters

AC Surge Protection

- Line-Earth 1.2/50us (8/20us): 2KV
- Line-Line 1.2/50us (8/20us): 1KV

Mechanical Characteristics

- Case: Plastic
- Color: White
- IP Rated: IP40
- Size: 95.3mm X 51mm X 34.5mm
- Weight: 135g

Safety Approvals

- CE
- FCC

EMI

- FCC CFR47 Part 15, EN55032, EN55035

EMS


- IEC61000-4-2(ESD) ± 6kV(contact), ±8kV(air)
- IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
- IEC61000-4-4(EFT) Power Port: ±2kV; Data Port:±1kV
- IEC61000-4-5(Surge) Power Port:±1kV/DM, ±2kV/CM
- IEC61000-4-6(CS) 10V(150kHz~80MHz)

Immunity

- IEC60068-2-6(Vibration)
- IEC60068-2-27(Impact)
- IEC60068-2-32(Free Fall)

LED Indicator

- PoE Load Indicator : Green

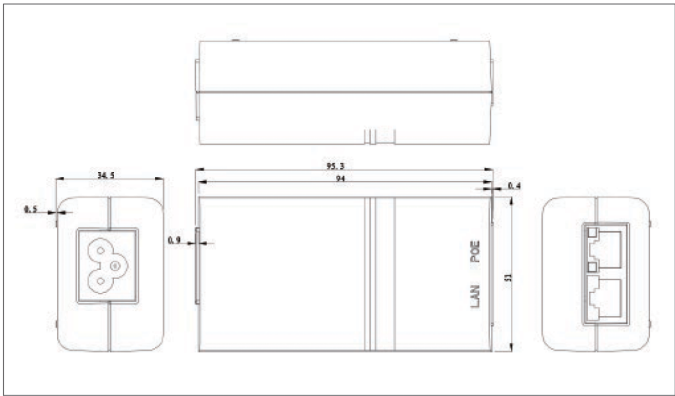

Order Info. UL-POE-24-30W-G

24Vdc/1.25A/1000Mbps/(4,5+,7,8-)

Packing. UL-POE-24-30W-G
Power cord not included
Manual x 1