

Reolink Video Doorbell WiFi

2K+ 5MP Wired Wi-Fi Video Doorbell with Chime

- Chime Included
- 5MP HD Video
- Person Detection



Specifications

Video & Audio	
Image Sensor	1/2.7" CMOS Sensor
Video Resolution	Default: 2560×1920 (5 megapixels) @20FPS
Lens	f=2.26mm F=2.0, with IR cut
Videoformat	H.264
Field of View	Horizontal: 135° Vertical: 100° Diagonal: 180°
Pre-Motion Recording	YES
Audio	Two-way audio, noise reduction, echo suppression
Quick Replies	YES
Power	
Hardwired	12-24V AC 50/60Hz, DC 24V

Interfaces	
Power	Power port
System	Reset button
Ethernet	One 10M/100Mbps RJ45
Storage	microSD card slot (Max. 256GB), works with Reolink NVR
Audio	Built-in two microphones & one speaker
Wi-Fi	
Wireless Standard	IEEE 802.11a/b/g/n
Operating Frequency	2.4GHz/5GHz
Wireless Security	WPA-PSK/WPA2-PSK
Software	
Frame Rate	Mainstream: 2fps - 20fps (default: 20fps) Substream: 4fps - 15fps (default: 10fps)
Code Rate	Mainstream: 1024Kbps - 6144Kbps (default: 4096Kbps) Substream: 64Kbps - 512Kbps (default: 256Kbps)
Browsers Supported	Edge, Chrome, Firefox, Safari
OS Supported	PC: Windows, Mac OS; Smartphone: iOS, Android
Smart Alarm	Motion detection/person detection/package detection; visitor notification
Recording Modes	Motion recording (default); 24/7 recording; scheduled recording
Protocols & Standards	HTTPS, IPv4, UPNP, RTSP, RTMP, ONVIF, SMTP, NTP, DHCP, DNS, DDNS, FTP, P2P
Work with	Google Assistant
Rich Notification	YES
Working Environment	

Temperature	Operating temperature: -10°C – +50°C (14°F – 122°F)
Humidity	Operating humidity: 10% – 90%
Weatherproof	IP65
Size & Weight	
Dimension	133mm (H) ×48mm (W) ×23mm (T)
Weight	96g
Warranty	
Limited Warranty	2-year limited warranty. For support, visit https://support.reolink.com/hc/en-us/ .


Gallery & Specs



- 1. Lens
- 2. Microphone
- 3. IR LED
- 4. Daylight Sensor
- 5. Button
- 6. Doorbell Status Light
- 7. Chime Status Light



- 1. Lens
- 2. Microphone
- 3. IR LED
- 4. Daylight Sensor
- 5. Button
- 6. Doorbell Status Light
- 7. Chime Status Light

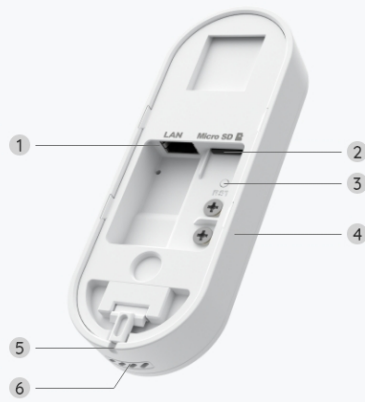

1. LAN Port
2. microSD Card Slot
3. Reset Button
4. Wiring Terminal
5. Pin Hole
6. Speakers



1. LAN Port
2. microSD Card Slot
3. Reset Button
4. Wiring Terminal
5. Pin Hole
6. Speakers