

Gigabit PoE Midspan/Injector

Product Overview

An indoor rated PoE midspan Injector specially designed for complex backhaul and networking applications. It provides 52Vdc, 0.58A power for remote PDs over 2 pairs output. It supports both 10/100 Base-T and Gigabit device.


It works for 30W PoE PDs, such as wireless APs, Wifi routers, Network cameras, IP Phones, Microwave Radio and other power Ethernet terminals.



Enclosed in an IP40 fire retardant plastic case. It works with a wide input voltage of 100-240 VAC, 50 or 60 Hz.

The effective distance is 100 meters over Cat5e/Cat6 cables. It is small in size but high performance.

Product Profile

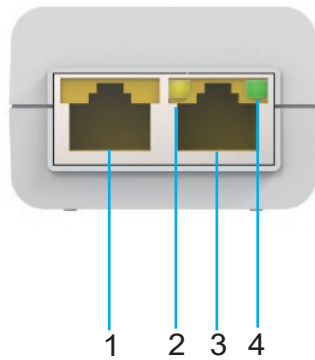


1. LAN: Data Input Port
2. Power Indicator
3. PoE: Data & Power Output Port



4. PoE Load Indicator
5. AC Power Input

Product Working Diagram

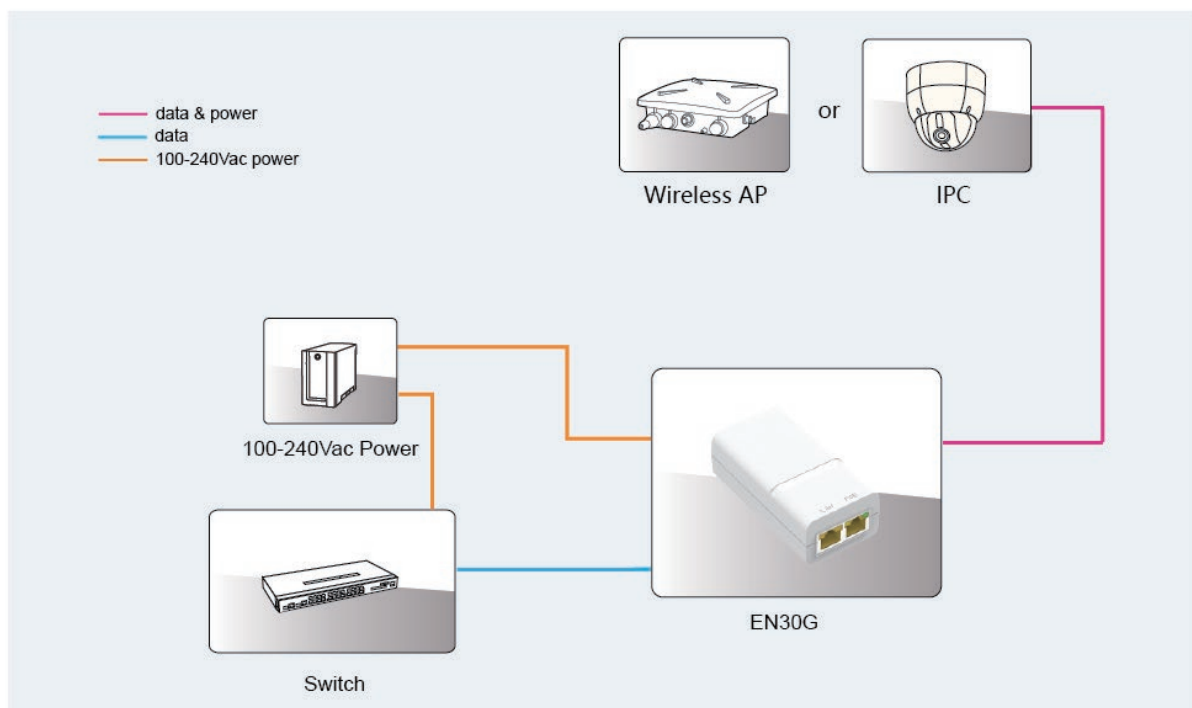

Specification

Standard

- IEEE802.3 10Base-T Ethernet
 - IEEE802.3u 100Base-Tx Fast Ethernet
 - IEEE802.3ab 1000Base-T Gigabit Ethernet
 - RoHS Compliance
 - WEEE Compliance
-

Input & Output

- Input :100-240Vac 1.0A 50/60Hz
 - Output: 52Vdc 580mA
 - Power Pins: 4/5(+), 7/8(-)
 - Data Speed: 10/100/1000Mbps
-

Working Environment

- Operating Temperature: 0℃ to 40℃
 - Operating Humidity: 20% to 80%, non-condensation
 - Storage Temperature: -20℃ to 70℃
 - Storage Humidity: 10% to 90%, non-condensation
 - Operating Altitude: up to 2000meters
-

AC Surge Protection

- Line-Earth 1.2/50us (8/20us): 2KV
 - Line-Line 1.2/50us (8/20us): 1KV
-

Mechanical Characteristics

- Case: Plastic
- Color: White
- IP Rated: IP40
- Size: 95.3mm X 51mm X 34.5mm
- Weight: 135g

Safety Approvals

- CE
 - FCC
-

EMI

- FCC CFR47 Part 15, EN55032, EN55035
-

EMS


- IEC61000-4-2(ESD) $\pm 6\text{kV}$ (contact), $\pm 8\text{kV}$ (air)
 - IEC61000-4-3(RS) 10V/m(80MHz~2GHz)
 - IEC61000-4-4(EFT) Power Port: $\pm 2\text{kV}$; Data Port: $\pm 1\text{kV}$
 - IEC61000-4-5(Surge) Power Port: $\pm 1\text{kV/DM}$, $\pm 2\text{kV/CM}$
 - IEC61000-4-6(CS) 10V(150kHz~80MHz)
-

Immunity

- IEC60068-2-6(Vibration)
 - IEC60068-2-27(Impact)
 - IEC60068-2-32(Free Fall)
-

LED Indicator

- Power Indicator : Yellow
- PoE Load Indicator : Green

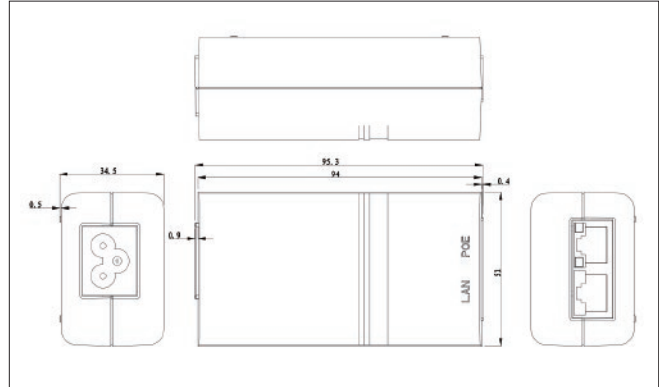

Order Info. UL-POE-52-30W-G

52Vdc/0.58A/1000Mbps/(4,5+,7,8-)

Packing. UL-POE-52-30W-G
Power Cord x 1
(Optional) Manual x 1